

# Cisco

## 300-625 Exam

**Cisco Implementing Cisco Storage Area Networking (DCSAN)  
Exam**

**Questions & Answers  
(Demo Version – Limited Content)**

**Thank you for Downloading 300-625 exam PDF Demo**

# Version: 4.0

---

## Question: 1

---

An engineer is configuring a SAN environment and attempts to activate a zoneset, but a lock is held by another user. Which argument does the engineer use to clear the lock from the zoning database configuration?

- A. commit
- B. abort
- C. clear
- D. force

---

**Answer: A**

---

Explanation:


[https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/6\\_2/configuration/guide/s/fabric/nx-os/nx\\_os\\_fabric/zone.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/6_2/configuration/guide/s/fabric/nx-os/nx_os_fabric/zone.html)

---

## Question: 2

---

Refer to the exhibit.

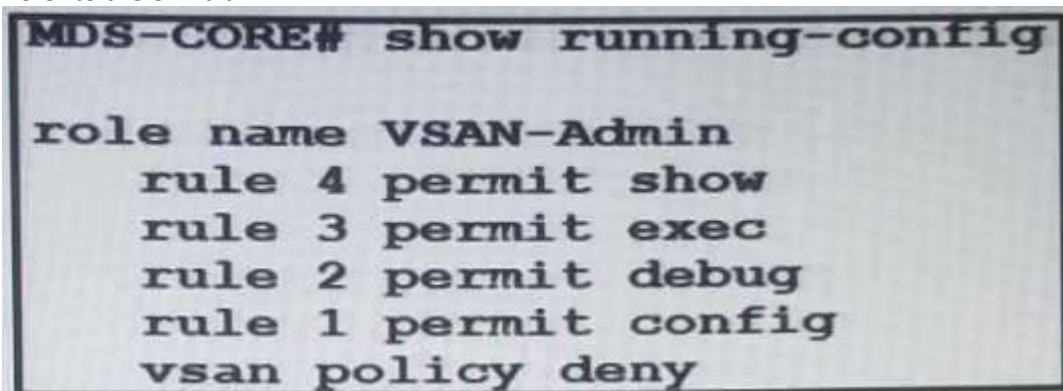

```
MDS-CORE# show running-config

role name VSAN-Admin
  rule 4 permit show
  rule 3 permit exec
  rule 2 permit debug
  rule 1 permit config
vsan policy deny
```

Refer to the exhibit. A network engineer created a new user that uses the VSAN-Admin role on a Cisco MDS switch so a new colleague can manage the VSANs configured on the switch. Which action is required for the configuration to give permission to the new colleague?

- A. permit vsan 1-1000 must be configured as rule 5
- B. permit vsan 1-1000 must be configured as rule 1
- C. permit vsan 1-1000 must be configured under the VSAN policy deny
- D. permit vsan 1-1000 must be configured under the VSAN policy allow

---

**Answer: C**

---



---

**Question: 3**

---

A storage network engineer is implementing disk any data replication between two SAN environments in two different data centers not connected via Fibre Channel Which SAN switch feature must be implemented?

- A. FCIP
- B. zoning merge over LAN
- C. VSAN scoping
- D. IVR

---

**Answer: A**

---



---

**Question: 4**

---

What is the effect of a non-graceful virtual machine shutdown on a virtualized server that is connected to a SAN with Fibre Channel interfaces?

- A. NP Port reload connected to the upstream SAN switch
- B. out-of-service Fibre Channel interfaces on the SAN switch
- C. frames stuck in the storage system
- D. frames stuck in the HBA buffer of the server

---

**Answer: D**

---



---

**Question: 5**

---

DRAG DROP

Drag and drop the FLOGI parameters from the left onto the descriptions from which they were derived on the right.

fwwn	VSAN-based swwn of the NPV device
IP address	IP address of the NPV device
symbolic node name	fwwn of the F Port on the NPV core switch
nwwn	NPV switch name
pwwn	fwwn of the NP Port

---

**Answer:**

---

fWWN	The fWWN of the F port on the NPV core switch.
IP address	The IP address of the NPV device.
symbolic node name	The NPV switch name.
nWWN	The VSAN-based sWWN of the NPV device.
pWWN	The fWWN of the NP port.

Explanation:

[https://www.cisco.com/en/US/docs/storage/san\\_switches/mds9000/sw/rel\\_3\\_x/configuration/guides/cli\\_3\\_2/npv.html](https://www.cisco.com/en/US/docs/storage/san_switches/mds9000/sw/rel_3_x/configuration/guides/cli_3_2/npv.html)

**Thank You for trying 300-625 PDF Demo**